

66/82/01
10/28/99
PTO U.S. 016965

UTILITY PATENT APPLICATION
TRANSMITTAL UNDER 37 C.F.R. §1.53(b)

ASSISTANT COMMISSIONER FOR PATENTS
Box PATENT APPLICATION
Washington D.C. 20231

Case Docket No.: K-007A

Sir:

Transmitted herewith for filing is the patent application of
INVENTOR OR APPLICATION IDENTIFIER: Tae Won KIM and Byung Keun LIM
FOR: DATA CONTROL SYSTEM IN CDMA MOBILE COMMUNICATION SYSTEM

Enclosed are:

1. ☒ 37 pages of specification, claims, abstract
2. ☒ 6 sheets of FORMAL drawings.
3. ☒ 2 pages of Declaration & Power of Attorney (copy from a prior application).
☒ Incorporation By Reference-The entire disclosure of the prior application is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
☒ This is a ☐ Continuation or ☒ Divisional of prior application No. 08/978,619, filed on November 26, 1997, entitled DATA CONTROL SYSTEM IN CDMA MOBILE COMMUNICATION SYSTEM
4. ☒ An Information Disclosure Statement and PTO 1449 Form are submitted herewith.
5. ☐ Cancel claims _____.
6. The filing fee is calculated on the basis of the claims existing in the prior application as amended at 5 above:

CLAIMS AS FILED					
For	No. Filed		No. Extra	Rate	Fee
Total Claims	34	- 20	14	X \$18.00	\$252.00
Indep. Claims	4	- 3	1	X \$78.00	\$ 78.00
Multiple Dependent Claims (If applicable) add \$260.					
BASIC FEE					\$760.00
TOTAL FILING FEE					\$1,090.00

7. ☐ Preliminary Amendment is enclosed.
- 8a. ☐ Enclosed is a Small Entity Statement.
- 8b. ☐ A Small Entity Statement was filed in prior application and such status is still proper and desired.
- 9a. ☒ A check in the amount of \$1,090.00 (Check # 7815) is attached.
- 9b. ☐ Please charge my Deposit Account No. 16-0607 in the amount of \$. A duplicate copy of this sheet is enclosed.
- 9c. ☐ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy is enclosed.
- ☐ Any additional filing fees required under 37 C.F.R. 1.16.
- 10a. ☒ The Commissioner is hereby authorized to charge fees under 37 C.F.R. 1.16 and 1.17 which may be required, including any extension of time fees to maintain the pendency of the parent application No. 08/978,619 or credit any overpayment to Deposit Account No. 16-0607.

10b. ☒ Authorization under 37 C.F.R. §1.136(a)(3).

11a. ☐ Amend the specification by inserting before the first line the sentence:

--This application is a Continuation of Application No. _____ filed _____.--

11b. ☐ Amend the specification by inserting before the first line the sentence:

--This application is a Divisional of Application No. _____ filed _____.--

12. ☒ Priority of Application Serial No. 58354/1996 filed on November 27, 1996, in Republic of Korea is claimed under 35 U.S.C. 119. The certified priority document was filed in Serial No. 08/978,619 on June 17, 1998.

13. ☒ The prior application is assigned of record to LG Information & Communications, Ltd.

14. ☒ The power of attorney in the prior application is to:

FLESHNER & KIM

15. ☒ Two (2) return postcards.

☒ Stamp & Return with Courier.


☒ Prepaid Postcard-Stamped Filing Date & Returned with Unofficial Serial Number.

16. ☒ Also enclosed: Request for Approval of Drawing Amendments

17. ☐ A petition, fee and response has been filed to extend the term in the pending prior application until _____.

Respectfully submitted,
FLESHNER & KIM

Daniel Y.J. Kim
Registration No. 36,186

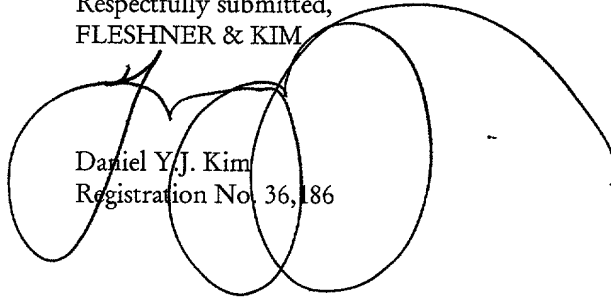

Correspondence Address Below:

P.O. Box 221200

Chantilly, VA 20153-1200

(703) 502-9440

Date: October 28, 1999

DYK:jld

APPLICATION FOR UNITED STATES LETTERS PATENT

INVENTORS: Tae Won KIM and Byung Keun LIM

TITLE: DATA CONTROL SYSTEM IN CDMA MOBILE
COMMUNICATION SYSTEM

ATTORNEYS: The Law Offices of
& FLESHNER & KIM
ADDRESS: P. O. Box 221200
Chantilly, VA 20153-1200

DOCKET NO.: K-007A

094303-103990

DATA CONTROL SYSTEM IN CDMA MOBILE COMMUNICATION SYSTEM

This application is a Divisional of Application No. 08/978,619 filed November 26, 1997.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a mobile communication system using a code division multiple access (hereinafter referred to as "CDMA") method, and more particularly, to a data control system in a CDMA mobile communication system which can provide mobile data communication to a mobile telephone subscriber, in addition to voice service, by using a CDMA mobile communication device.

2. Background of the Related Art

Generally, a CDMA mobile communication network exchanges by radio a voice signal between a mobile telephone and a telephone through a base station and a switching system, in a CDMA method.

To this end, a conventional mobile communication system includes radio base stations which ensure the mobile telephones by regions and controls them and a controller and a switching system which control each of the radio base stations and

connect the distance between the radio base station and adjacent one thereto to achieve the transmission of the radio signal.

In the conventional mobile communication system, however, only the voice signal communication is possible through the mobile communication network and data communication provided through a wire communication network such as a public switching telephone network(hereinafter referred to as "PSTN") is not possible. Therefore, the successful achievement of the data communication through the wire communication network is possible by means of a modem which is mounted on a computer. In other words, the modems should be mounted on all of computers in order to achieve the data communication through the wire communication network.

The above references are incorporated by reference herein where appropriate for appropriate teachings of additional or alternative details, features and/or technical background.

SUMMARY OF THE INVENTION

An object of the invention is to solve at least the above problems and/or disadvantages and to provide at least the advantages described hereinafter.

Accordingly, the present invention is directed to a data control system in a CDMA mobile communication system that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

An object of the invention is to provide a data control system in a CDMA mobile communication system which can achieve data communication with a public network subscriber, even if a modem is not mounted on a computer of a mobile telephone subscriber, and simultaneously minimize data transmission error rate even in an irregular environment of radio data transmitting/receiving sections between a mobile telephone and a radio base station.

To accomplish this and other objects of the present invention, a data control system in a CDMA mobile communication system having a mobile telephone which is provided with a serial input/output (SIO) port connectable to a computer, a radio base station which receives/transmits a radio wave applied from each mobile telephone of a mobile telephone subscriber, and a base station controller and mobile switching system which controls the radio base station installed by areas and exchange a voice signal by connecting the radio base stations to each other, the data control system includes: a connection device to mobile data which receives an asynchronous mobile data communication service request message by the mobile telephone subscriber from the base station controller and mobile switching system and if communication is made with a public network subscriber, transmits/receives asynchronous mobile data to/from the mobile telephone subscriber along a mobile data path through the base station controller and mobile switching system; a connection device to public network data which receives the asynchronous mobile data communication service request message by a public

network subscriber from the base station controller and mobile switching system and if communication is made with the mobile telephone subscriber, transmits/receives the asynchronous mobile data to/from the public network subscriber along a public network data path through the base station controller and mobile switching system; a data processing device which modem-processes the asynchronous mobile data from the mobile telephone subscriber by occupying an idle modem resource for asynchronous mobile data communication and by connecting a channel B to the mobile telephone subscriber to thereby output the processed data as the public network data and protocol-processes the asynchronous mobile data from the public network subscriber by assigning a modem resource of a modem port and by connecting one channel to the public network data to thereby output the processed data as the mobile data; a switching device which outputs the asynchronous mobile data outputted from the data processing device to the connection device to the public network data and outputs the asynchronous mobile data from the public network subscriber to the connection device to the mobile data, while transmitting the asynchronous mobile data from the connection device to the mobile data and the connection device to the public network data to the data processing device; and a main processing device which assigns the idle modem resource for the asynchronous mobile data communication, if the asynchronous mobile data communication service request exists by the mobile telephone subscriber from the connection device to the mobile data and then checks whether the idle modem resource is occupied by the data

processing device and the connection state of the channel B, to thereby set the mobile data path between the data processing device and the connection device to the mobile data through the switching device and at the same time checks the modem resource in which modem environment is constructed by using the channel B of the data processing device and the connection state of the one channel assigned to the public network data, to thereby set the public network data path between the data processing device and the connection device to the public network data through the switching device.

Preferably, the data processing device is comprised of a main controller for occupying the idle modem resource in accordance with the signal from the main processing device, controlling the connection of channel B, and constituting a user modem environment using the channel B by the main processing device, based upon the setting of the mobile data path; a protocol processor for inputting and outputting the asynchronous mobile data from the mobile telephone subscriber from the switching device through the channel B port assigned by the main controller and for converting the asynchronous mobile data from the public network subscriber inputted through the public network path to be adapted for the channel B communication to thereby output the converted data to the switching device; a modem processor for detecting a carrier, if incoming and calling command signals are inputted from the main processing device, and if link between modems is set, for inputting the asynchronous mobile data from the public network subscriber from the switching device to thereby output the inputted data

to the protocol processor and for inputting and modem-processing the asynchronous mobile data from the mobile telephone subscriber outputted from the protocol processor to thereby output the processed data to the switching device; and an application interface controller for interfacing data between the protocol processor and the modem processor and transmitting the command of the main controller to each of them.

In the data processing device, on the other hand, the protocol processor is preferably comprised of: a transmission controller for detecting and correcting error of data inputted/outputted to/from the application interface controller; an inter-terminating point link controller for building a protocol stack between terminating points of link hierarchy, transmission hierarchy and application interface hierarchy between the data processing device in the mobile data communication control system and a personal computer after setting the mobile data path; a transmission interrupting routine for transmitting data from the public network subscriber to the mobile communication subscriber; a reception interrupting routine for transmitting data from the mobile communication subscriber to the public network subscriber; an SVC/M controlling and managing part for managing signalling with a selector vocorder controller of the base station controller and mobile switching system; and a transmission frame forming and releasing part for forming or releasing a frame of transmitting/receiving data in a PCM system.

In the data processing device, furthermore, the modem processor preferably includes: a modem controller for detecting and correcting error of data inputted/outputted to/from the application interface controller; a transmission interrupting routine for transmitting data from the mobile communication subscriber to the public network subscriber; a reception interrupting routine for transmitting data from the public network subscriber to the mobile communication subscriber; and a modem and a modem controller connected with a modem of the public network subscriber through the public network, for transmitting/receiving data to/from the modem.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objects and advantages of the invention may be realized and attained as particularly pointed out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described in detail with reference to the following drawings in which like reference numerals refer to like elements wherein:

FIG. 1 is a block diagram illustrating a basic construction of a CDMA mobile data communication system for executing mobile data communication with a public network subscriber according to the present invention;

FIG. 2 is a block diagram illustrating construction of the mobile data communication control system of FIG. 1;

FIG. 3 is a block diagram illustrating a detailed construction of the data processing device of FIG. 2;

FIG. 4A is a block diagram illustrating construction of the selector vocorder control module (SVCM) of the base station controller of FIG. 2 and the protocol processor 53b of the base station controller 53 of FIG. 3;

FIG. 4B is a block diagram illustrating construction between the modem processor of FIG. 3 and the modem of the public network subscriber;

FIG. 5A is a format diagram illustrating a data frame between the vocorder and the transmission frame forming and releasing module of FIG. 4A;

FIG. 5B is a format diagram illustrating a data frame of the SVCM controlling and managing module of FIG. 4A; and

FIG. 5C is a data format diagram illustrating the encoding packet of FIG. 4A.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

FIG. 1 is a block diagram illustrating a basic construction of a CDMA mobile data communication system according to the present invention, in which a mobile communication subscriber can execute the mobile data communication with a public network subscriber by using the CDMA communication network.

As shown in FIG. 1, in the basic construction for the mobile data communication, there are provided a first personal computer 10, a mobile telephone 20, a radio base station 30, a base station controller and mobile switching system 40, a mobile data communication control system 50, a public network 60, a modem 70 and a second personal computer 80.

For the data communication service under the existing public network, the first personal computer like the second personal computer also should mount the modem 70 thereon, but in the mobile data communication system according to the present invention the mobile telephone 20 is connected to the first personal computer of the mobile telephone subscriber which executes the data communication, to thereby provide the mobile data communication service by radio with the existing public network subscriber.

Hence, the connection of the first personal computer 10 with the mobile telephone 20 is made by means of the SIO port, and a communication channel setting method of the

existing mobile telephone is directly applied between the mobile telephone 20 and the radio base station 30.

On the other hand, the base station controller and mobile switching system 40 checks whether the applied mobile data is voice traffic or mobile data traffic and if it corresponds to the voice traffic, connects the data with other side's subscriber through the mobile switching system. However, if the mobile data corresponds to the mobile data traffic, the base station controller and mobile switching system 40 connects a call to the mobile data communication control system 50 through the mobile switching system, such that the mobile telephone subscriber can achieve the mobile data communication with his desired public network subscriber.

If an opposite party's telephone number is inputted in the first personal computer 10, the inputted telephone number is converted into a calling message on a radio communication network in the mobile telephone 20 and is then transmitted to the radio base station 30.

Then, the calling message is transmitted to the base station controller and mobile switching system 40, in which it is checked whether or not the message is a mobile data communication service request message to thereby set the connection with the mobile data communication control system 50.

Accordingly, the mobile telephone subscriber can execute the mobile data communication with his desired public network subscriber by the mobile data communication control system 50.

Now, an explanation of the construction of the mobile data communication control system as shown in the above will be discussed with reference to FIGS. 2 and 3.

The mobile data communication control system 50 constructed according to the present invention includes a connection device to mobile data 51, a connection device to public network data 52, a data processing device 53, a switching device 54, and a main processing device 55. As shown in Figure 2, the thick solid lines represent a signal and traffic path, the thin solid lines represent a signal path, and the dotted lines represent a traffic path. The detailed construction of the data processing device 53 is shown in FIG. 3.

The connection device to the mobile data 51 receives the mobile data communication service request message by the mobile telephone subscriber from the base station controller and mobile switching system 40, and if the communication connection is made with the public network subscriber, transmits/receives the mobile data to/from the mobile telephone subscriber along the mobile data path through the base station controller and mobile switching system 40.

The connection device to the public network data 52 receives the mobile data communication service request message by the public network subscriber from the base

station controller and mobile switching system 40, and if the communication connection is made with the mobile telephone subscriber, transmits/receives the mobile data to/from the public network subscriber along the public network path through the base station controller and mobile switching system 40.

5 The data processing device 53 modem-processes the mobile data from the mobile telephone subscriber by occupying an idle modem resource of a channel B port for the mobile data communication and by connecting a channel B to the mobile telephone subscriber to thereby output the processed data as the public network data and protocol-processes the mobile data from the public network subscriber by assigning a modem resource of a modem port and by connecting one channel to the public network data to thereby output the processed data as the mobile data.

 The switching device 54 outputs the mobile data outputted from the data processing device 53 to the connection device to the public network data 52 and outputs the mobile data from the public network subscriber to the connection device to the mobile data 51, while transmitting the mobile data from the connection device to the mobile data 51 and the connection device to the public network data 52 to the data processing device 53.

 The main processing device 55 assigns the idle modem resource for the mobile data communication, if the mobile data communication service request exists by the mobile telephone subscriber from the connection device to the mobile data 51 and then checks

whether the idle modem resource is occupied by the data processing device 53 and the connection state of the channel B, to thereby set the mobile data path between the data processing device 53 and the connection device to the mobile data 51 through the switching device 54 and at the same time checks the modem resource in which modem environment is constructed by using the channel B of the data processing device 53 and the connection state of the one channel assigned to the public network data, to thereby set the public network data path between the data processing device 53 and the connection device to the public network data 52 through the switching device 54.

On the other hand, an explanation of the construction of the data processing device 53 of FIG. 3 will be hereinafter discussed.

The data processing device 53 is comprised of a main controller 53a, a protocol processor 53b, a modem processor 53c and an application interface controller 53d.

The main controller 53a occupies the idle modem resource in accordance with application of the signal from the main processing device 55, controls the connection of channel B, and controls a user modem environment using the channel B by the main processing device 55, based upon the setting of the mobile data path.

The protocol processor 53b inputs and outputs the mobile data from the mobile telephone subscriber from the switching device 54 through the channel B port assigned by the main controller 53a and converts the mobile data from the public network

subscriber inputted through the public network path to be adapted for the channel B communication to thereby output the converted data to the switching device 54.

The modem processor 53c inputs the mobile data from the public network subscriber from the switching device 54, if link between modems is set after incoming and calling command signals are inputted from the main processing device 55, to thereby output the inputted data to the protocol processor 53b and inputs and modem-processes the mobile data from the mobile telephone subscriber outputted from the protocol processor 53b to thereby output the processed data to the switching device 54.

Finally, the application interface controller 53d interfaces data between the protocol processor 53b and the modem processor 53c and transmits the command of the main controller 53a to each of the protocol processor 53b and the modem processor 53c.

As shown in FIG. 4A showing the construction of the selector vocorder control module (SVCN) of the base station controller of FIG. 2 and the protocol processor 53b of the base station controller 53 of FIG. 3, there are provided a transmission controller 53b-1, an inter-terminating point link controller 53b-2, an SVCN controlling and managing part 53b-3, a transmission interrupting routine 53b-4, a reception interrupting routine 53b-5, and a transmission frame forming and releasing part 53b-6.

The transmission controller 53b-1 detects and corrects error of data inputted/outputted to/from the application interface controller 53d. The inter-terminating point link controller 53b-2 builds a protocol stack between terminating

points of link hierarchy, transmission hierarchy and application interface hierarchy between the data processing device 53 in the mobile data communication control system 50 and the second personal computer 80 after setting the mobile data path.

The transmission interrupting routine 53b-4 transmits data from the public network subscriber to the mobile communication subscriber and the reception interrupting routine 53b-5 transmits data from the mobile communication subscriber to the public network subscriber.

Finally, the SVCMM controlling and managing part 53b-3 manages signalling with a selector vocorder controller 40a of the base station controller and mobile switching system 40, and the transmission frame forming and releasing part 53b-6 forms or releases a frame of transmitting/receiving data in a PCM system.

As shown in FIG. 4B showing the construction between the modem processor 53c of FIG. 3 and the modem of the public network subscriber, there are provided a modem controller 53c-1, a transmission interrupting routine 53c-2, a reception interrupting routine 53c-3, and a modem and modem controller 53c-4.

The modem controller 53c-1 detects and corrects error of data inputted/outputted to/from the application interface controller 53d.

The transmission interrupting routine 53c-2 transmits data from the mobile communication subscriber to the public network subscriber, and the reception

interrupting routine 53c-3 transmits data from the public network subscriber to the mobile communication subscriber.

Finally, the modem and modem controller 53c-4 is connected with the modem of the public network subscriber through the public network, for transmitting/receiving data to/from the modem.

Under the above construction, an explanation of operation of the CDMA mobile data communication system according to the present invention will be discussed.

Firstly, the mobile telephone subscriber requests communication connection with the public network subscriber.

The mobile telephone subscriber inputs and outputs an AT command for the mobile data communication from the first personal computer 10 of FIG. 1, and an originating call is transmitted to the selector vocorder controller 40a of the base station controller and mobile switching system 40. The selector vocorder controller 40a then checks whether it is the voice communication or mobile data communication and if it is checked that it corresponds to the data communication request message, transmits/receives in a predetermined frame format the signal message to/from the mobile data communication control system 50, to thereby set the mobile data path.

In other words, after the main processing device 55 which manages the connection device to the mobile data 51 of the mobile data communication control system 50 checks that the mobile telephone subscriber from the base station controller and mobile

switching system 40 desires to execute the mobile data communication, the main processing device 55 assigns the idle modem resource and outputs a modem initializing command message to the data processing device 53 of the mobile data communication control system 50.

5 Then, the main controller 53a of the data processing device 53 which receives the modem initializing command message from the main processing device 55 of the mobile data communication control system 50, checks the occupying state of the idle mode resource and sets a modem basic construction value.

 Then, the main controller 53a provides information containing success or failure relative to the modem initializing command message to the main processing device 55.

 The main processing device 55 tries to connect the modem of the public network subscriber with the modem of the mobile data communication control system 50 in accordance with the modem initializing command message, and if the connection therebetween is made, the mobile telephone subscriber can execute the mobile data communication with the second personal computer 80 of the public network subscriber.

 At the time, after setting the mobile data path, the protocol stack should be built between the terminating points of the link hierarchy, transmission hierarchy and application interface hierarchy between the data processing device 53 in the mobile data communication control system 50 and the second personal computer 80.

On the other hand, in the case where the mobile telephone subscriber during the mobile data communication performs a hand-off operation, or in the case where he or she passes through a tunnel region where a radio communication network can not be connected, since a data communication radio link protocol part 40b positioned under the selector vocorder controller 40a of the base station controller and mobile switching system 40 can not transmit/receive data to and from a data communication radio link protocol part positioned within the interior of the mobile telephone, these parts continually endeavor to transmit the data to each other.

If the transmission of the radio data is not executed during a predetermined time period, the data communication radio link protocol parts on both sides retry to execute an initial process to match their own synchronization.

Through these processes, the data transmission error rate can be minimized upon passing the radio section, and thus the number of data retransmission times transmitted/received between the terminating point users and the transmitted/received data transmission error rate can be all minimized.

The selector vocorder controller 40a of the base station controller and mobile switching system 40 is 21 bytes in size of buffer and has a queue being comprised of 265 entries, to thereby provide the data communication service.

After a predetermined time period elapses, however, if the order of data is incorrect and the error in the transmission packet between the inter-terminating point link

controllers 53b-2, data transmission is retried through the higher rank of protocol module.

In this case, the higher rank of protocol module which receives the incorrect frame, discards the received frame and requests data retransmission, and as a result, the transmission load on the lower rank of construction is greatly increased. However, while the mobile telephone subscriber is during the data communication, if the data retransmission and the synchronous resetting is executed between the two data communication radio link protocol parts, the state of the selector vocorder controller 40a, after a predetermined time elapses, of the base station controller and mobile switching system 40 is checked when the public network subscriber transmits the call to the mobile telephone subscriber. As a result, an amount of data to be transmitted to the selector vocorder controller 40a of the base station controller and mobile switching system 40 can be adjusted.

On the other hand, FIG. 5A showing the frame format used in the mobile data path, that is, between the vocorder 40c of the base station controller and mobile switching system 40 and the transmission frame forming and releasing part 53b-6 of the mobile data communication control system 50.

In the frame format, there are provided the preamble 4 bytes in which information required in the vocorder 40c are stored and a message 4 bytes in which information

required for transmitting/receiving data between the vocorder 40c and the mobile data communication control system 50 are stored.

The encoding packet 32 bytes include the data information and control signal of the mobile radio data communication.

5 The CRC 2 bytes is used for detecting and checking the error of transmission data.

The symbol "F" means a flag indicative of the end of data and is comprised of 1 byte having a value of 0 x 7E.

The idle pattern 117 bytes are used as a spare byte.

10 The frame having such the format as shown in FIG. 5A is used as the frame having the preamble 4 bytes, the message 4 bytes and the encoding packet 32 bytes in the SVCMM controlling and managing part 53b-3, as shown in FIG. 5B.

15 On the other hand, in the encoding packet 32 bytes as shown in FIG. 5C, first 1 byte as a traffic channel data rate indicates a transmission pattern of data within the radio section, second 1 byte as a traffic information format indicates null traffic or data traffic, and third 1 byte as a control signal code indicates the contents of signal information between the selector vocorder controller 40a of the base station controller and mobile switching system 40 and the SVCMM controlling and managing part 53b-3 of the mobile data communication control system 50.

20 Fourth 1 byte as information frame management number indicates the management number of information frame transmitted/received between the selector

vocoder controller 40a of the base station controller and mobile switching system 40 and the SVCN controlling and managing part 53b-3 of the mobile data communication control system 50.

Fifth to eighth 1 byte are not used for another purpose and the following 20 bytes indicates data information to be transmitted to the counterpart. The last 4 bytes are not yet used.

Generally, the size of information transmitted in the selector vocoder controller 40a of the base station controller and mobile switching system 40 is 21 bytes, 1 byte of which is used for the purpose of information order of the radio section.

The information frame management number corresponding to the fourth 1 byte of the encoding packet is increased by one only in case of the data packet and is not increased in case of a voice communication signal or null traffic.

Meanwhile, a control signal type and code in the control signal code corresponding to the third 1 byte of the encoding packet is as follows:

A signal O x 11 in the control signal code indicates a reception-possible control signal, which is used when the selector vocoder controller 40a of the base station controller and mobile switching system 40 can continually receive the data from the mobile data communication control system 50.

A signal O x 22 indicates an SVCN reception-impossible control signal, which is used when the selector vocoder controller 40a of the base station controller and mobile

switching system 40 can not temporarily receive the data from the mobile data communication control system 50.

A signal O x 33 indicates a specific information frame retransmission request control signal, which is used when the retransmission of a specific information frame received from the mobile data communication control system 50 is requested. As a result, the mobile data communication control system 50 which has received the control signal, retransmits the next information frame, including the corresponding information frame.

A signal O x 44 indicates a control signal of acknowledging the data reception, which is used when the information frame of previously received data is received without any problem. In case of the retransmission frame, the control signal of acknowledging the data reception is not transmitted.

The selector vocorder controller 40a of the base station controller and mobile switching system 40 can increase a transmission efficiency of data provided from the public network by transmitting these control signals to the mobile data communication control system 50 in accordance with the transmitting/receiving current states accumulated relative to abnormal environment of the radio section.

As clearly appreciated from the above, a data control system in a CDMA mobile communication system according to the present invention can achieve data communication with a public network subscriber, even if a modem is not mounted on a computer of a mobile telephone subscriber, and simultaneously increase a transmission

efficiency of mobile data in the mobile communication network by controlling and managing data information frame between a mobile data communication control system and an SVCM of a base station controller.

It will be apparent to those skilled in the art that various modifications and variations can be made in a data control system in a CDMA mobile communication system of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

The foregoing embodiments and advantages are merely exemplary and are not to be construed as limiting the present invention. The present teaching can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled in the art. In the claims, means-plus-function clauses are intended to cover the structures described herein as performing the recited function and not only structural equivalents but also equivalent structures.

WHAT IS CLAIMED IS:

1. A data communication control system in a mobile communication system,
comprising:

a base station controller and switching system which determines a communication path which selectively provides a voice communication service or a data communication service in response to a call request requested by a calling party, and outputs data and signals which control call connection between the calling party and a called party through the determined communication path; and

a data control system which selectively modulates and demodulates data from said base station controller and switching system by performing protocol communication with said base station controller and switching system.

2. The data communication control system of claim 1, wherein at least one of the calling party and the called party includes a data terminal which outputs predetermined data, and a communication device connected with the data terminal which transmits the data on a wireless or wire communication network.

3. The data communication control system of claim 1, wherein said data control system comprises:

a connection device to mobile data which provides a data path for signals and data transmission between a base station and said data control system;

5 a connection device to public network data which connects a public network of said data control system with a public network of said base station controller and switching system and sets a data traffic path between said data control system and said base station controller and switching system;

10 a data processing device which performs protocol communication with the base station and selectively modulates and demodulates input data to provide the modulated or demodulated data to the called party or the calling party; and

a main processing device which assigns a resource of said data control system and identifies the state of the resource in response to a data call request of the base station.

4. The data communication control system of claim 3, further comprising a switching device which switches and controls the resources assigned to said data processing device and said connection device to public network data by a control signal of said main processing device.

5. The data communication control system of claim 1, wherein a format of a data frame used for communication between said base station controller and switching system and said data control system comprises:

a first field which provides information required for said base station
5 controller and switching system;

a second field which provides information required for communication
between said base station controller and switching system and said data control system;

a third field which provides transmission data and control information
during data communication between said base station controller and switching system and
10 said data control system; and

a fourth field which represents an end of the transmission data.

6. The data communication control system of claim 5, wherein said third field
comprises:

a fifth field which represents a transmission type of data sent to a radio
period;

a sixth field which represents a traffic information type;

a seventh field which represents a control signal code; and

an eighth field which represents a control number of the data frame.

7. The data communication control system of claim 1, wherein said data
control system identifies the transmission state of said base station controller and

switching system and transmits a message which controls an amount of the data to be transmitted to said base station controller and switching system.

8. A method for controlling a data communication between a calling party and a called party in a communication system having a base station controller and switching system and a data control system, the method comprising the steps of:

determining a communication path in the base station controller and switching system in response to a call request signal of the calling party;

assigning a first modem provided with the data control system and initializing the first modem if a determined result is data communication;

setting a communication path by connecting a second modem provided with the called party with the first modem provided with the data control system; and

performing data communication between the calling party and the called party through the communication path.

9. The method for controlling a data communication of claim 8, wherein the step of initializing the first modem further comprises the steps of:

transmitting a modem initiation command from the base station controller and switching system to the data control system; and

5 identifying an unused modem resource occupancy by the data control system and setting a basic value of the first modem.

10. A method for controlling a data communication between a calling party and a called party in communication system having a base station controller and switching system, a connection device to mobile data for providing a data path for signals and data transmission between the mobile station and the data control system, a connection device to public network data for connecting a public network of the data control system with a public network of the base station controller and switching system and setting a data traffic path between the data control system and the switching system, a data processing device for performing protocol communication with the mobile station and selectively modulating and demodulating input data to provide the modulated or demodulated data to the called party or the calling party, and a main processing device for assigning a resource of the data control system and identifying the state of the resource in response to a data call request of the mobile station, and providing various information for system control to the system user, the method comprising the steps of:

informing arrival of a call setting request message from the base station controller and switching system to the main processing device in response to a call request signal of the calling party;

identifying a type of a call by the main processing device and assigning a modem resource suitable for the type of the call;

performing protocol communication between the data processing device and the calling party using link resources provided between the base station controller and switching system and the connection device to mobile data;

connecting to the called party through a channel resource provided between the base station controller and switching system and the connection device to the public network data, and setting a communication network path based on the connection state; and

performing data communication between the calling party and the called party through the communication path.

11. The method for controlling a data communication of claim 10, wherein the step of setting the communication path further comprises the steps of:

requesting a path setting request message in the base station controller and switching system by the connection device to public network data; and

connecting to the public network by the base station controller and switching system and informing the main processing device of the connection result through the connection device to public network data.

12. The method for controlling a data communication of claim 10, wherein the step of setting the communication network path further comprises the steps of:

requesting a path setting request message in the connection device to the public network data by the base station controller and switching system; and

5 setting a data path of the connection device to the public network data and the data processing device by the connection device to a public network using a channel resource of the set data processing device.

13. The method for controlling a data communication of claim 10, wherein the step of setting the communication path further comprises the steps of:

requesting a path setting request message in the base station controller and switching system by the connection device to public network data;

5 connecting to the public network of the base station controller and switching system and informing the main processing device of the connection result through the connection device to public network data;

requesting a path setting request message in the connection device to the public network data by the base station controller and switching system; and

10 setting a data path of the connection device to public network data and the data processing device using a channel resource of the set data processing device by the connection device to public network data.

14. The data communication control system of claim 3, wherein said main processing device further provides system control information to a system user.

15. The data communication control system of claim 1, wherein said base station controller and switching system further comprises:

a selector vocoder controller;

a data communication radio link protocol unit; and

a vocoder.

16. The data communication control system of claim 15, wherein said selector vocoder controller further comprises a buffer having a size of 21 bytes, and a queue comprised of 265 entries.

17. The method for controlling a data communication of claim 11, wherein the calling party is a mobile station and the called party is a land station.

18. The method for controlling a data communication of claim 12, wherein the calling party is a land station and the called party is a mobile station.

19. The method for controlling a data communication of claim 13, wherein the calling party and the called party are mobile stations.

20. The data communication control system of claim 2, wherein the communication device is one of a modem and a mobile telephone.

21. The data communication control system of claim 1, further comprising a base station coupled to said base station controller and switching system; and
a public network coupled to said base station controller and switching system.

22. The data communication control system of claim 21, further comprising a mobile telephone which transmits and receives data signals to and from said base station; and

a first personal computer coupled to said mobile telephone by a serial
5 input/output port.

23. The data communication control system of claim 22, further comprising a modem coupled to said public network; and

a second personal computer coupled to said modem.

24. The data communication control system of claim 3, wherein said data processing device further comprises:

a main controller coupled to said main processing device;

a protocol processor which transmits and receives mobile data;

5 a modem processor which transmits and receives data to and from the public network; and

an application interface controller coupled to said main controller which interfaces data between said protocol processor and said modem processor.

25. The data communication control system of claim 24, wherein said protocol processor further comprises:

a transmission controller coupled to said application interface controller;

an inter-terminating point link controller, which builds a protocol stack;

5 a transmission interrupting unit, which transmits data from a public network subscriber to a mobile communication subscriber;

a reception interrupting unit, which transmits data from the mobile communication subscriber to the public network subscriber;

10 a transmission frame forming or releasing part, which forms or releases a frame of transmission/receiving data; and

a selector vocorder control module (SVCN), which manages signaling with a selector vocorder of said base station controller and switching system.

26. A data communication control system of claim 24, wherein said modem processor further comprises:

a modem controller coupled to said application interface controller;

a transmission interrupting unit, which transmits data from a mobile communication subscriber to a public network subscriber;

a reception interrupting unit, which transmits data from the public network subscriber to the mobile communication subscriber; and

a modem and modem controller coupled to said public network.

27/ A data communication system, comprising:
a first communication device having a first data transfer protocol;
a second communication device having a second data transfer protocol; and
a communication network which exchanges data between said first communication device and said second communication device, wherein the first data transfer protocol and the second data transfer protocol are different.

28. The data communication system of claim 27, wherein said first communication device comprises a first computer coupled to a mobile telephone.

29. The data communication system of claim 28, wherein said second communication device comprises a second computer coupled to a modem.

30. The data communication system of claim 27, wherein said communication network comprises:

a mobile data communication control system which protocol processes the data from said first and second communication devices such that the data can be exchanged between said first and second communication devices; and

a base station controller and switching system which directs the data to and from said mobile data communication control system.

31. The data communication system of claim 30, further comprising:

a base station in communication with said first communication device and said base station controller; and

a public network in communication with said second communication device and said base station controller.

32. The data communication system of claim 31, wherein said base station is in wireless communication with said first communication device.

33. The data communication system of claim 30, wherein said mobile data communication control system further comprises:

a connection device to mobile data, coupled to transfer data to and from said first communication device via said base station controller and switching system;

5 a connection device to public network data coupled to transfer data to and from said second communication device via said base station controller and switching system;

a main processing device;


a switching device; and

10 a data processing device.

34. The data communication system of claim 27, wherein said first data transfer protocol corresponds to CDMA.


ABSTRACT OF THE DISCLOSURE

A data control system in a CDMA mobile communication system can achieve data communication with a public network subscriber, even if a modem is not mounted on a computer of a mobile telephone subscriber, and simultaneously minimize data transmission error rate even in an irregular environment of radio data transmitting/receiving sections between a mobile telephone and a radio base station.

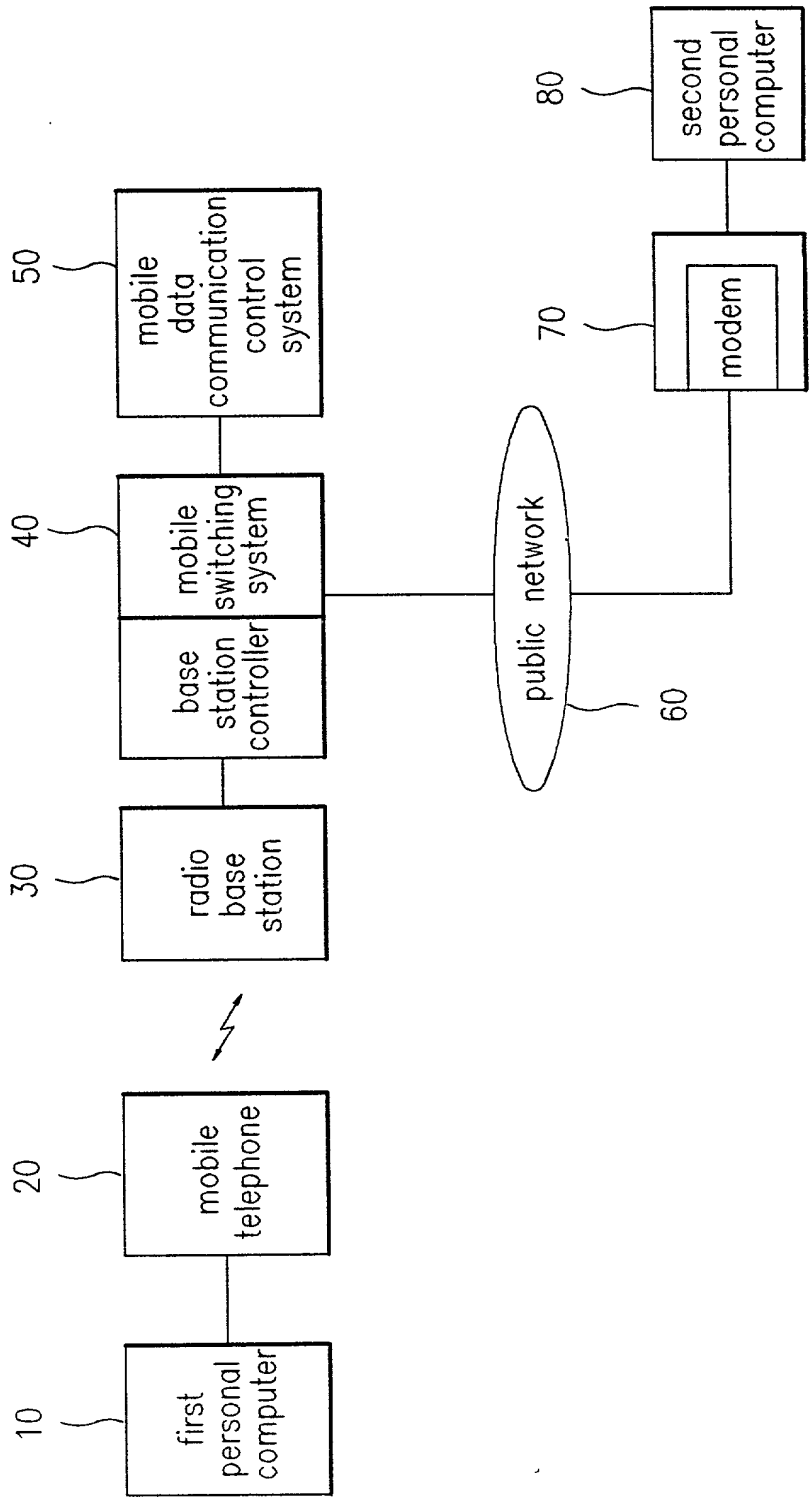

F I G.2

50(mobile data communication control system)

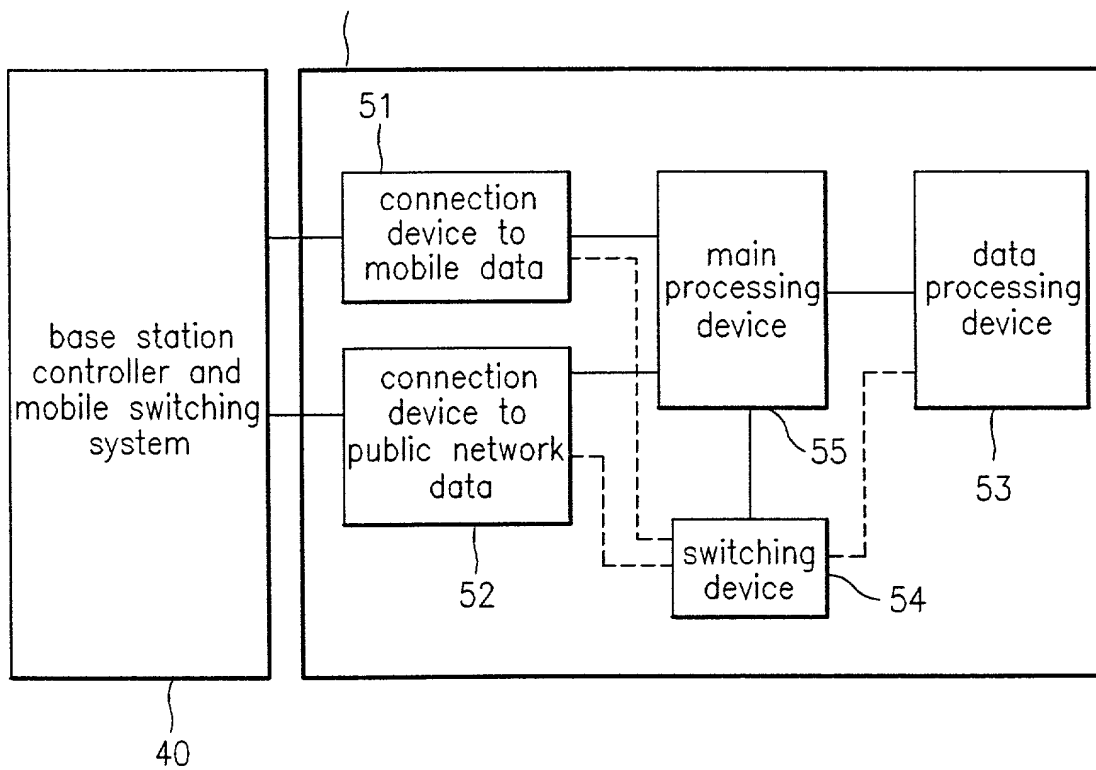

F I G.3



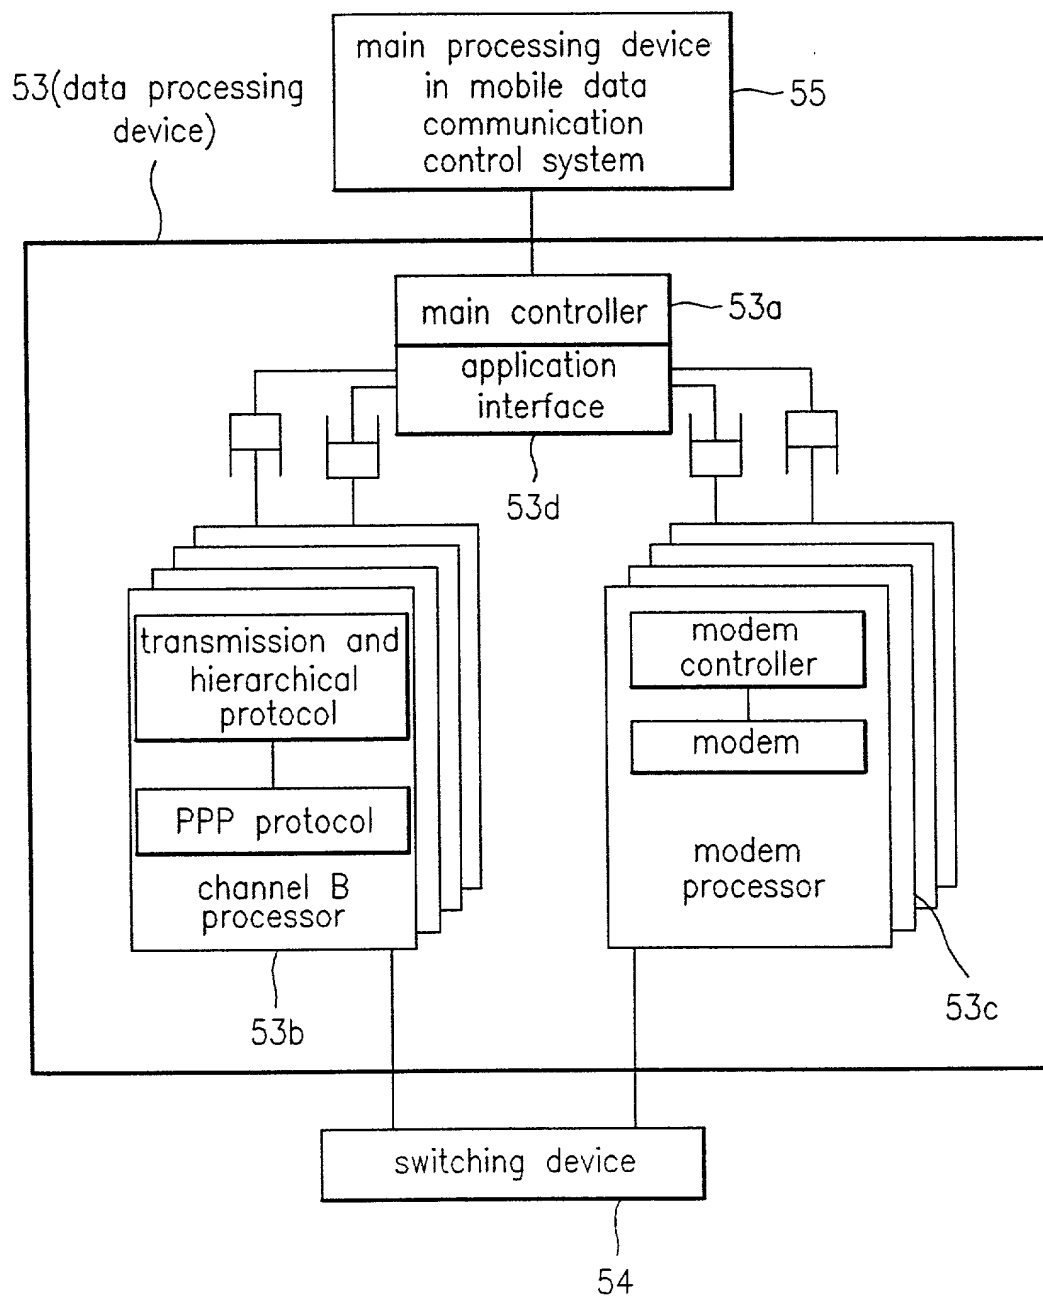


FIG. 4A

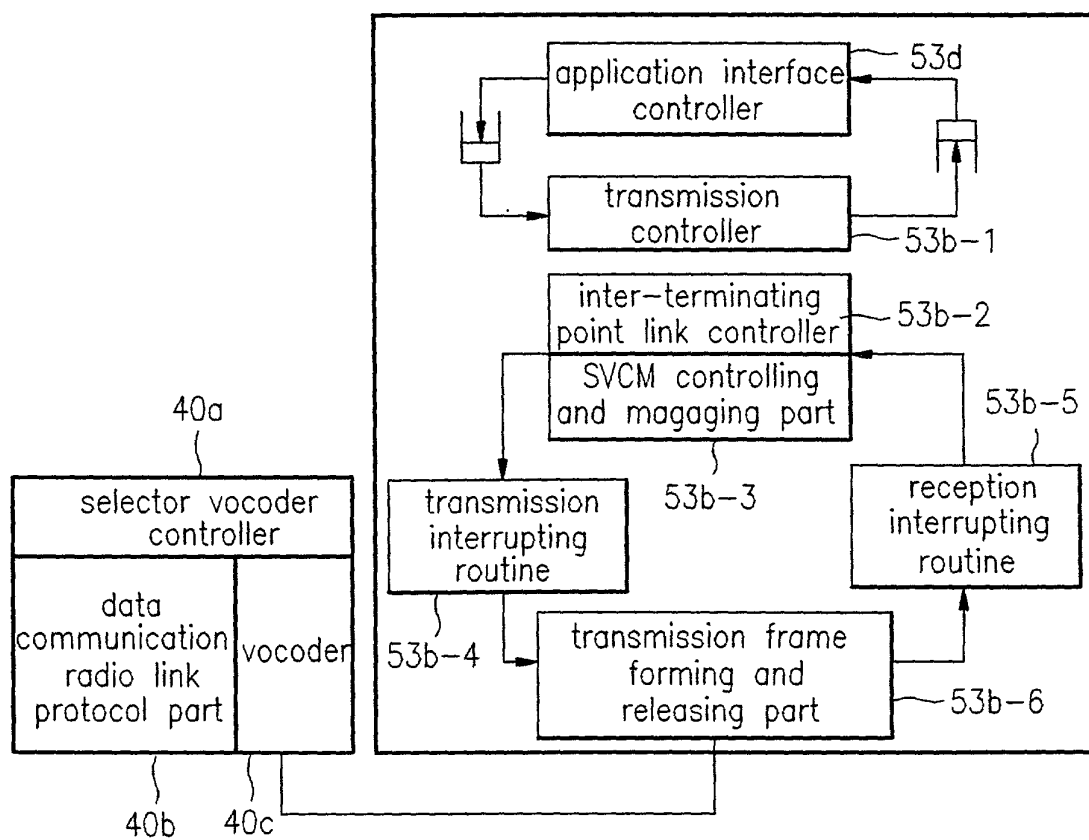

F I G.4B

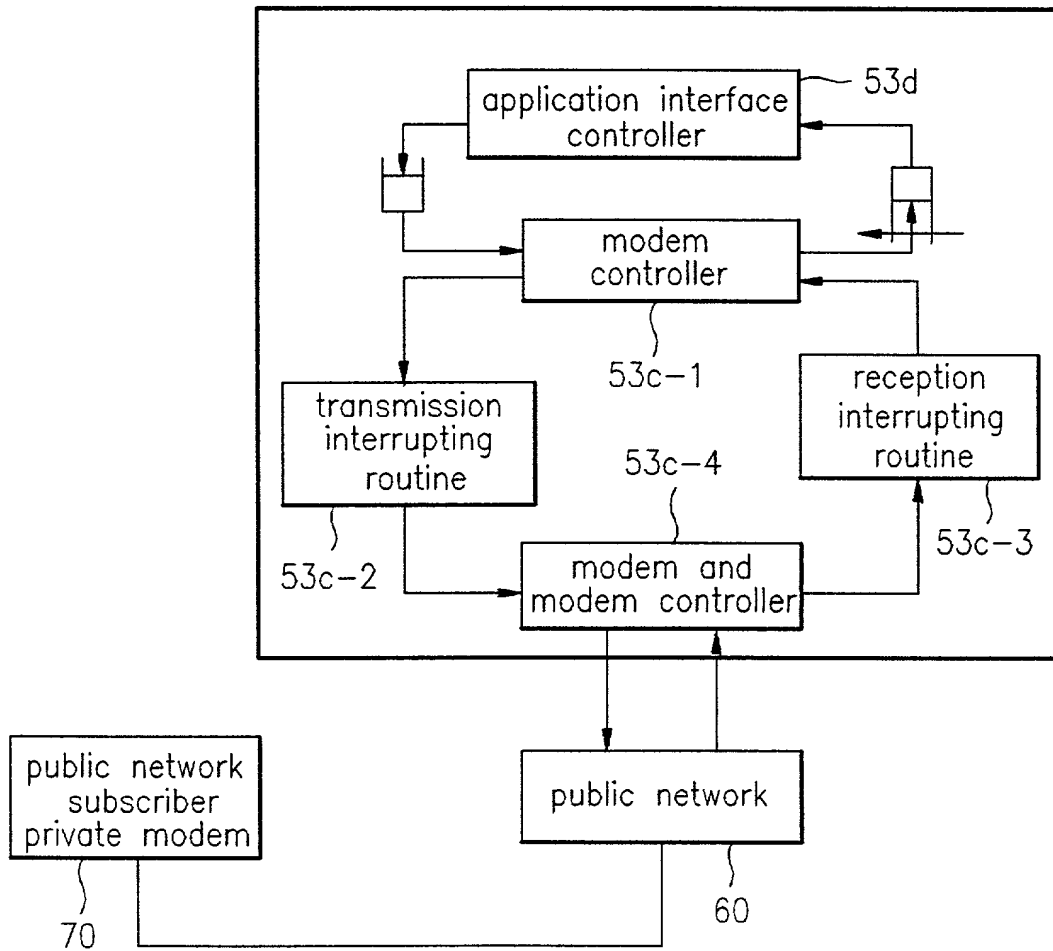

F I G.5A

preamble 4 byte	message 4 byte	encoding packet 32 byte	CRC 2	F 1	idle pattern 117 byte
--------------------	-------------------	----------------------------	----------	--------	--------------------------

F I G.5B

preamble 3 byte	message 4 byte	encoding packet 32 byte
--------------------	-------------------	----------------------------

F I G.5C

1	traffic channel data rate
2	traffic information format
3	control signal code
4	information frame management number
5	not-defined(reserved)
6	
7	
8	
9	data information(20 byte)
10	
:	
:	
:	
28	
29	
:	
:	
32	
	nonuse(4 byte)

[illegible]

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

□
□

•

• •

:

:

REQUEST FOR APPROVAL OF DRAWING AMENDMENTS

Assistant Commissioner for Patents
Washington, D. C. 20231

Sir:

Approval of the changes made to Figures 2 and 3, as shown in red ink on the attached photocopy, is courteously solicited.

Respectfully submitted,
FLESHNER & KIM

Daniel Y.J. Kim
Registration No. 36,186


P. O. Box 221200
Chantilly, Virginia 20153-1200
703 502-9440

Date: October 28, 1999


DYK:jld

FIG. 2

50 (mobile data communication control system)

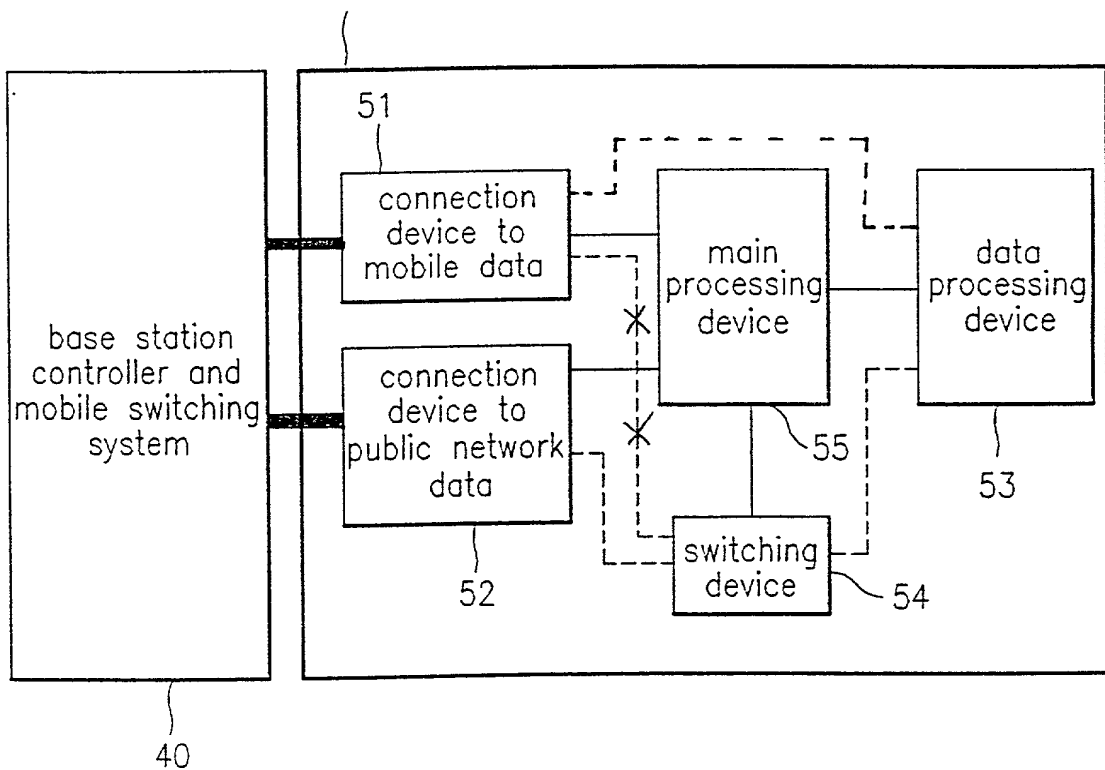

F I G.3

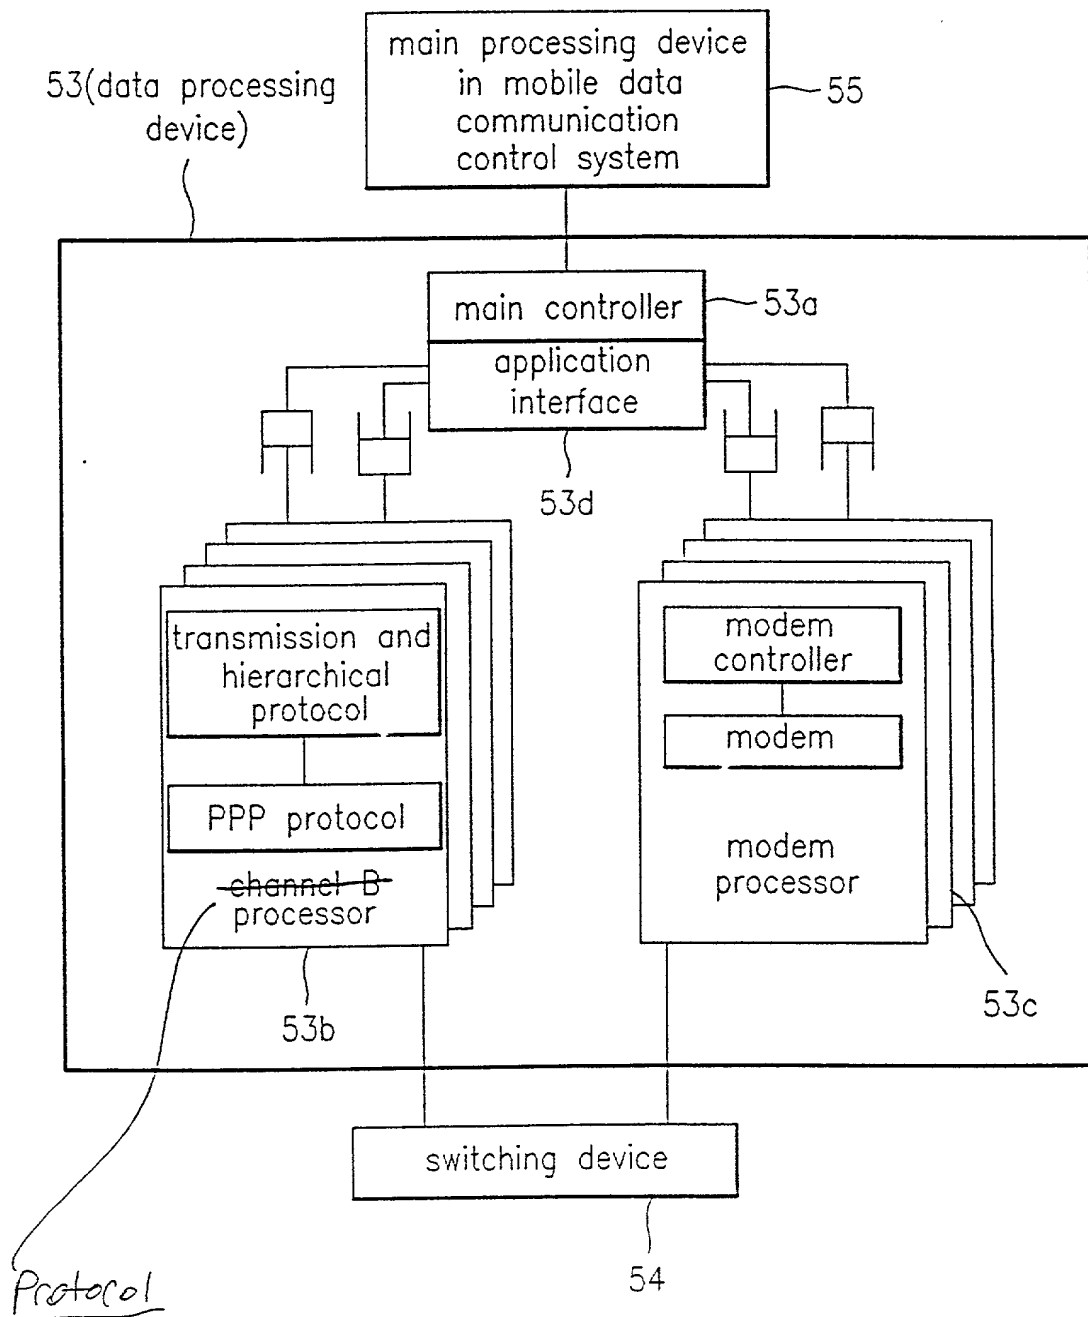

Docket No.: K-007

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought on the invention entitled _____

DATA CONTROL SYSTEM IN CDMA MOBILE COMMUNICATION SYSTEM

the specification of which

[] is attached hereto [X] was filed on Nov 26, 1997 as Application Serial No. _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority or provisional application benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate, or provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate, or provisional application(s) having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) or U.S. Provisional Application(s):			Priority Claimed	
Number	Country	Day/Month/Year	Yes	No
58354/1996	Korea	27/11/1996	X	

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U. S. Application(s):		Status: Patented, Pending, Abandoned
Serial No.	Filing Date	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) and/or agent(s): Daniel Y.J. Kim, Registration No. 36,186 and Mark L. Fleshner, Registration No. 34,596; Mark G. Toohey, Registration No. 35,392; Carl R. Wesolowski, Registration No. 40,372, John C. Eisenhart, Registration No. 38,128, and Rene A. Vazquez, Registration No. 38,647, all of

The Law Offices of
FLESHNER & KIM
P. O. Box 221200
Chantilly, Virginia 20153-1200

with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to them.

Full name of sole or first inventor: Tae Won KIM

Inventor's signature: Tae Won KIM

Date: February 2, 1998

Residence: Kyungki-do, Korea

Citizenship: Republic of Korea

Post Office Address: Woosung APT. 112-403, Bono-dong, Ansan-si, Kyungki-do, Korea

Full name of joint inventor(s): Byung Keun LIM

Inventor's signature: Byung Keun LIM

Date: February 2, 1998

Residence: Kyungki-do, Korea

Citizenship: Republic of Korea

Post Office Address: Wooruk APT. 711-1801, Sanbon-dong, Kunpo-si, Kyungki-do, Korea

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship:

Post Office Address: